

Technical Data Sheet

Centrex ASA 485CS NAT 000000NAT



Acrylonitrile Styrene Acrylate

Product Description

Centrex ASA 485CS NAT 000000NAT is a Acrylonitrile Styrene Acrylate material and is typically used in Coextrusion, Extrusion, Thermoforming applications. Features include: Good Melt Strength, Good Weather Resistance, Low Gloss, Medium Impact Resistance, and UV Resistant.


Regulatory Status

For regulatory compliance information, see ASA 485CS NAT 000000NAT [Product Stewardship Bulletin \(PSB\)](#) and [Safety Data Sheet \(SDS\)](#).

Status	Commercial: Active
Availability	North America
Processing Method	Coextrusion; Extrusion
Attribute	Good Melt Strength; Good Weather Resistance; Low Gloss; Medium Impact Resistance; UV Resistant
Forms	Pellets
Application	Automotive Applications; Automotive Exterior Parts; Automotive Interior Parts; Exterior Trim; Outdoor Applications

Typical Properties	Nominal Value	Units	Test Method
Physical			
Melt Flow Rate			
(220 °C/10.0 kg)	6.1	g/10 min	ISO 1133
(220 °C/10.0 kg)	5.0	g/10 min	ASTM D1238
Density, (23 °C, Method A)	1.07	g/cm ³	ISO 1183
Density - Specific Gravity	1.06	g/cm ³	ASTM D792
Mechanical			
Tensile Strength at Yield, (5.1 mm/min)	26.5	MPa	ASTM D638
Flexural Modulus, (1.3 mm/min, Tangent)	1380	MPa	ASTM D790
Tensile Modulus, (5.1 mm/min)	1450	MPa	ASTM D638
Flexural Strength, (1.3 mm/min)	38.6	MPa	ASTM D790
Impact			
Instrumented Dart Impact			
(23 °C, Total Energy)	24.0	J	ASTM D3763
(-30 °C, Total Energy)	6.00	J	ASTM D3763
(-18 °C, Total Energy)	16.0	J	ASTM D3763
Notched Izod Impact			
(-40 °C, 3.18 mm)	43	J/m	ASTM D256
(23 °C, 3.18 mm)	130	J/m	ASTM D256
(-18 °C, 3.18 mm)	64	J/m	ASTM D256
Hardness			
Rockwell Hardness, (R-Scale)	69		ASTM D785
Thermal			
Vicat Softening Temperature	100	°C	ASTM D1525

Deflection Temperature Under Load Unannealed (264 psi), (3.18 mm)	68.3 °C	ASTM D648
Coefficient of Linear Thermal Expansion (CLTE), Flow	9.4E-05 cm/cm/°C	ASTM D696
Optical		
Gloss		
(60°)	10	ASTM D523
(60°)	20	ASTM D523
UL Information		
Flame Rating, (1.5 mm)	HB	UL 94
UL File Number, (USA)	E150937	

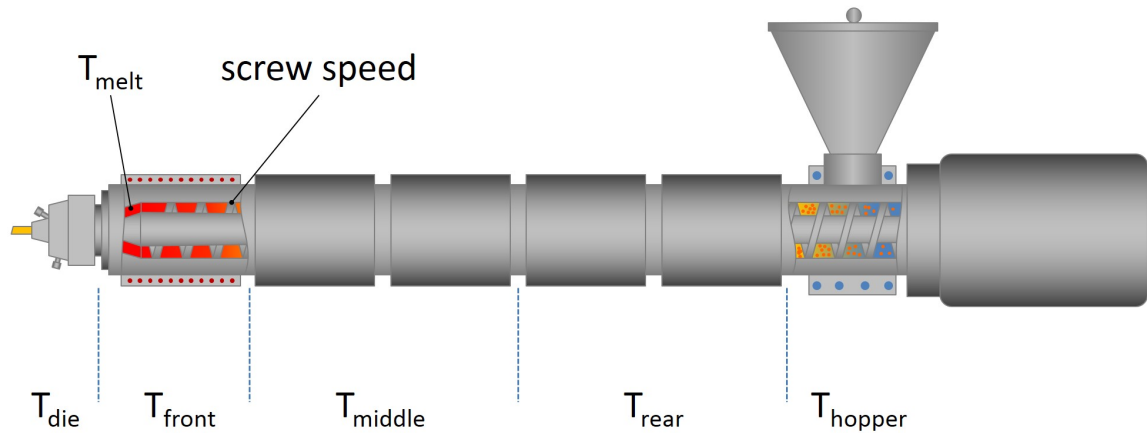

Extrusion Parameters	Nominal Value	Units
Drying Time	3.0 to 4.0	hr
Melt Temperature	204 to 243	°C
Suggested Max Moisture	<0.030	%
Die Temperature	210 to 241	°C
Suggested Max Regrind	40	%
Drying Temperature	82 to 93	°C

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.