

Technical Data Sheet

Centrex ASA 825A.2A950 Genie Gray



Acrylonitrile Styrene Acrylate

Product Description

Centrex ASA 825A.2A950 Genie Gray is a Acrylonitrile Styrene Acrylate material and is typically used in Extrusion, Sheet Extrusion, Thermoforming applications. Features include: Good Melt Strength, Good Weather Resistance, High Gloss, High Impact Resistance, and UV Resistant.


Regulatory Status

For regulatory compliance information, see Centrex ASA 825A.2A950 Genie Gray [Product Stewardship Bulletin \(PSB\)](#) and [Safety Data Sheet \(SDS\)](#).

Status	Commercial: Active
Availability	North America
Processing Method	Extrusion; Sheet Extrusion
Attribute	Good Melt Strength; Good Weather Resistance; High Gloss; High Impact Resistance; UV Resistant
Forms	Pellets
Application	Marine Applications; Outdoor Applications; Sheet; Spas; Water Sports Equipment

Typical Properties	Nominal Value	Units	Test Method
Physical			
Melt Flow Rate			
(230 °C/3.8 kg)	3.0	g/10 min	ASTM D1238
(220 °C/10.0 kg)	12	g/10 min	ASTM D1238
Density - Specific Gravity	1.05	g/cm ³	ASTM D792
Mechanical			
Tensile Elongation at Yield	2.7	%	ASTM D638
Tensile Strength at Yield, (5.1 mm/min)	44.1	MPa	ASTM D638
Flexural Modulus, (1.3 mm/min, Tangent)	2100	MPa	ASTM D790
Tensile Modulus, (5.1 mm/min)	2280	MPa	ASTM D638
Flexural Strength, (1.3 mm/min)	48.3	MPa	ASTM D790
Impact			
Notched Izod Impact			
(23 °C, 3.18 mm)	210	J/m	ASTM D256
(-30 °C, 3.18 mm)	91	J/m	ASTM D256
(-18 °C, 3.18 mm)	110	J/m	ASTM D256
Thermal			
Deflection Temperature Under Load Unannealed (264 psi), (3.18 mm)	77.7	°C	ASTM D648
Coefficient of Linear Thermal Expansion (CLTE), Flow, (-40 to 40 °C)	8.1E-5	cm/cm/°C	ASTM D696
Coefficient of Linear Thermal Expansion (CLTE), Perpendicular, (-40 to 4 °C)	1.1E-4	cm/cm/°C	ASTM D696

RTI Elec		
(1.5 mm)	50.0 °C	UL 746B
(3.0 mm)	50.0 °C	UL 746B
(0.75 mm)	50.0 °C	UL 746B
RTI Imp		
(1.5 mm)	50.0 °C	UL 746B
(3.0 mm)	50.0 °C	UL 746B
(0.75 mm)	50.0 °C	UL 746B
RTI Str		
(1.5 mm)	50.0 °C	UL 746B
(3.0 mm)	50.0 °C	UL 746B
(0.75 mm)	50.0 °C	UL 746B
Flammable		
Hot-wire Ignition (HWI)		UL 746A
Optical		
Gloss, (60°, Untextured, High Gloss Surface)	90 to 100	ASTM D2457
UL Information		
Flame Rating		
(1.5 mm)	HB	UL 94
(3.0 mm)	HB	UL 94
(0.75 mm)	HB	UL 94
UL File Number	E51193	
Outdoor Suitability		UL 746C

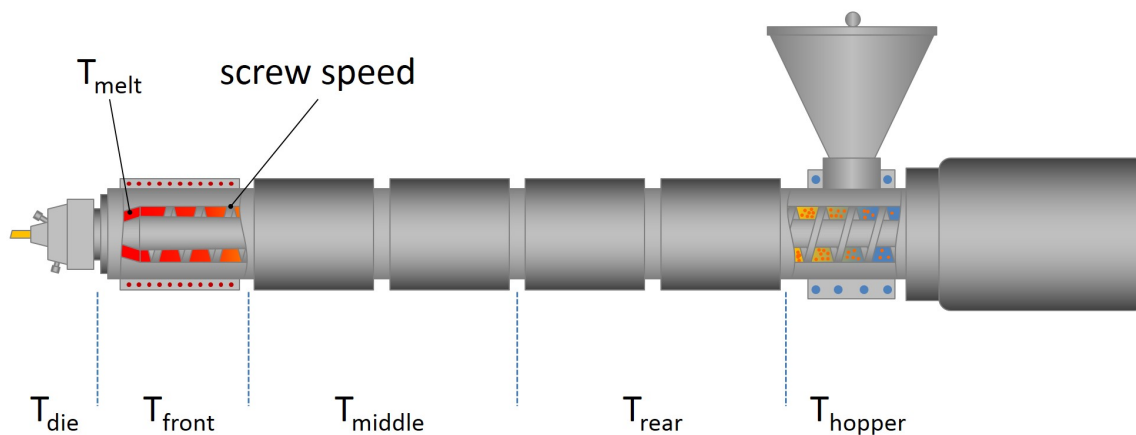

Extrusion Parameters	Nominal Value	Units
Drying Time	3.0 to 4.0	hr
Suggested Max Moisture	<0.020	%
Suggested Max Re grind	40	%
Drying Temperature	82 to 93	°C

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.