

Technical Data Sheet

DuraGrip DGR-6080BKBLK



Thermoplastic Elastomer

Product Description

DuraGrip DGR 6080BK is designed to be a general-purpose Thermoplastic Elastomer (TPE) that is easy to use in an injection molding process. DGR 6080NC has an excellent soft touch feel, will bond to olefinics, and is easy to color. *DuraGrip* is not hygroscopic and under normal conditions does not require drying.


Regulatory Status

For regulatory compliance information, see DGR-6080BKBLK [Product Stewardship Bulletin \(PSB\) and Safety Data Sheet \(SDS\)](#).

Status	Discontinued
Availability	Asia-Pacific; Europe; North America
Processing Method	Injection Molding
Forms	Pellets
Appearance	Black
Application	General Purpose

Typical Properties	Nominal Value	Units	Test Method
Physical			
Density	0.988	g/cm ³	ISO 1183
Density - Specific Gravity	0.99	g/cm ³	ASTM D792
Change in Volume			
(in ASTM #1 Oil, 100 °C, 168 hr)	6.0	%	ISO 1817
(in ASTM #1 Oil, 100 °C, 168 hr)	6.0	%	ASTM D471
(in IRM 903 Oil, 100 °C, 168 hr)	82	%	ASTM D471
(in IRM 903 Oil, 100 °C, 168 hr)	82	%	ISO 1817
(in Water, 100 °C, 168 hr)	1.0	%	ASTM D471
(in Water, 100 °C, 168 hr)	1.0	%	ISO 1817
(in Reference Fuel B, 24 °C, 168 hr)	54	%	ISO 1817
(in Reference Fuel B, 24 °C, 168 hr)	54	%	ASTM D471
Melt Viscosity, (190 °C, 300 sec ⁻¹)	219	Pa·s	ASTM D3835
Mechanical			
Tensile Stress at 100%			
(23 °C)	2.54	MPa	ASTM D412
(23 °C)	2.54	MPa	ISO 37
Tensile Set, (100%)	16	%	ASTM D412
Tensile Strength at Yield, (23 °C)	8.30	MPa	ASTM D412
Tensile Stress at Yield, (23 °C)	8.30	MPa	ISO 37
Tensile Strain at Break, (23 °C)	310	%	ISO 37
Tensile Elongation at Break	310	%	ASTM D412
Tear Strength, (24 °C, Die C)	33.4	kN/m	ASTM D624
Impact			
Ductile/Brittle Transition Temperature	-61.1	°C	ISO 812
Hardness			

Durometer Hardness, (Shore A, 5 sec)	81	ASTM D2240
Additional Information		
Compression Set		
(24 °C, 22 hr, Method B)	26 %	ASTM D395
(100 °C, 22 hr, Method B)	63 %	ASTM D395
(24 °C, 22 hr)	26 %	ISO 815
(100 °C, 22 hr)	63 %	ISO 815
(70 °C, 22 hr, Method B)	48 %	ASTM D395
(70 °C, 22 hr)	48 %	ISO 815
(24 °C, 22.0 hr, Method B)	26 %	ASTM D395
(70 °C, 22.0 hr, Method B)	48 %	ASTM D395
(100 °C, 22.0 hr, Method B)	63 %	ASTM D395
Taber Abrasion Resistance, (CS-17 Wheel, 1000 g, 1000 Cycles)	0.0125 mg	ASTM D3389

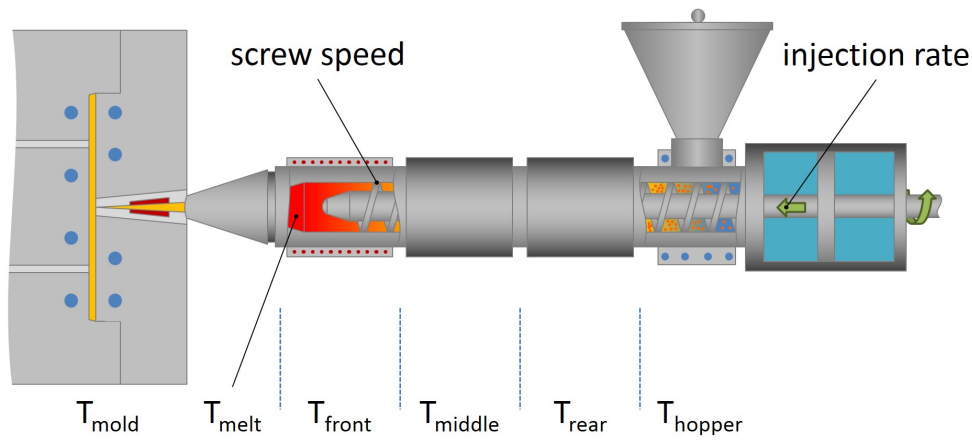

Injection Parameters	Nominal Value	Units
Drying Time	3	hr
Drying Temperature	66	°C
Nozzle Temperature	204 to 221	°C
Screw Speed	25 to 100	rpm
Processing (Melt) Temp	199 to 221	°C
Front Temperature	216 to 227	°C
Middle Temperature	199 to 210	°C
Rear Temperature	188 to 199	°C
Mold Temperature	43 to 54	°C
Injection Pressure	1.03 to 4.14	MPa

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.