

Technical Data Sheet

Schulatec PP EVC 01 BLK



Polypropylene, Specialty Products

Product Description

Schulatec PP EVC 01 BLACK EXP is an experimental PP compound with special rubber modification for extruded EV battery cooling tubes.


Regulatory Status

For regulatory compliance information, see *Schulatec PP EVC 01 BLK* [Product Stewardship Bulletin \(PSB\)](#) and [Safety Data Sheet \(SDS\)](#).

This grade is not intended for medical, pharmaceutical, food and drinking water applications.

Availability	Europe
Processing Method	Extrusion
Attribute	Impact Modified; Water/Glycol Resistance
Appearance	Black
Application	Automotive Applications

Typical Properties	Nominal Value	Units	Test Method
Physical			
Melt Volume Flow Rate			
(230 °C/2.16 kg)	4.0	cm ³ /10 min	ISO 1133
(230 °C/5.0 kg)	20	cm ³ /10 min	ISO 1133
Density	0.91	g/cm ³	ISO 1183-1/A
Mechanical			
Tensile Stress at Yield, (Type 1, 23 °C, 50 mm/min)	18	MPa	ISO 527-2
Nominal Tensile Strain at Break, (23 °C)	>400	%	ISO 527-2
Flexural Modulus, (23 °C)	1100	MPa	ISO 178
Tensile Strain at Yield, (Type 1A, 23 °C, 50 mm/min)	15	%	ISO 527-2
Tensile Modulus, (23 °C)	1000	MPa	ISO 527-1
Flexural Stress, (23 °C)	25	MPa	ISO 178
Impact			
Charpy Impact Strength - Notched			
(23 °C)	30	kJ/m ²	ISO 179-1/1eA
(-40 °C)	5	kJ/m ²	ISO 179-1/1eA
Charpy Impact Strength - Unnotched			
(23 °C)	No Break		ISO 179-1/1eU
(-40 °C)	No Break		ISO 179-1/1eU
Thermal			
Deflection Temperature Under Load			
(0.45 MPa, Unannealed)	80	°C	ISO 75-2/B
(1.80 MPa, Unannealed)	50	°C	ISO 75-2/A
Flammable			
Burning Rate	<100	mm/min	FMVSS 302

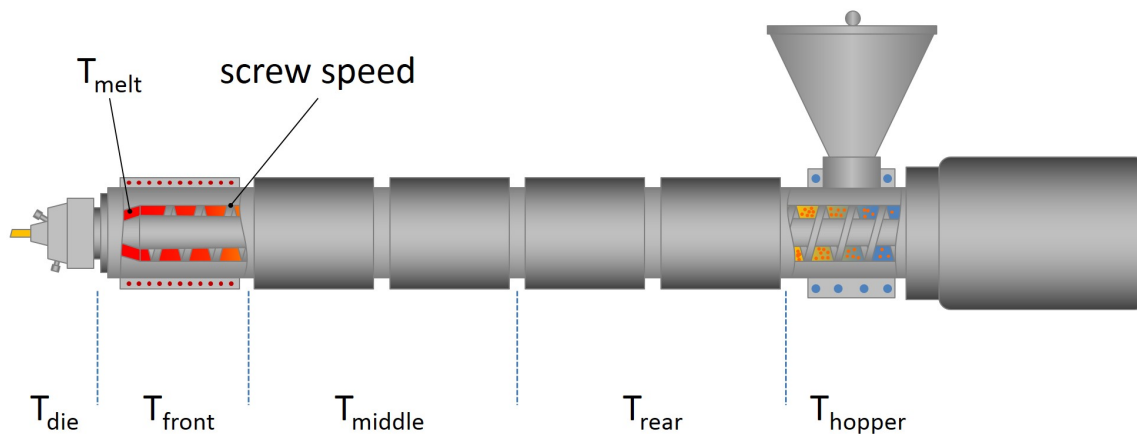

Extrusion Parameters	Nominal Value	Units
Melt Temperature	210-230	°C

Notes

These are typical property values not to be construed as specification limits.

Processing Techniques

Specific recommendations for resin type and processing conditions can only be made when the end use, required properties and fabrication equipment are known.

Company Information

For further information regarding the LyondellBasell company, please visit <http://www.lyb.com/>.

© LyondellBasell Industries Holdings, B.V. 2018

Disclaimer

Information in this document is accurate to the best of our knowledge at the date of publication. The document is designed to provide users general information for safe handling, use, processing, storage, transportation, disposal and release and does not constitute any warranty or quality specification, either express or implied, including any warranty of merchantability or fitness for any particular purpose. Users shall determine whether the product is suitable for their use and can be used safely and legally.

In addition to any prohibitions of use specifically noted in this document, LyondellBasell may further prohibit or restrict the sale of its products into certain applications. For further information, please contact a LyondellBasell representative.

Trademarks

The Trademark referenced within the product name is owned or used by the LyondellBasell family of companies.